





ML-200

2" Mechanical Seam Panel

PANEL WIDTHS	14", 16" or 18" (standard), other widths by quote
MINIMUM SLOPE	1/2" on 12" (with hot melt applied)
PANEL ATTACHMENT	Concealed fixed or expansion clips, Mechanically-locked seam
PANEL BASE METAL	Galvalume 24 ga. (standard), Aluminum/Copper/Galvanized by quote
PROFILE	Smooth, optional Flat Ribs, Pencil Ribs or Striations
FINISH	Standard SpectraLume® 70% PVDF
SEALANT	Optional non-skinning isobutyl
U.L.	Based on 24ga. steel 16" wide panel or narrower
TESTING	ASTM E-1680-95, E-1646-95, E-1592, E-283-04, E-331-00

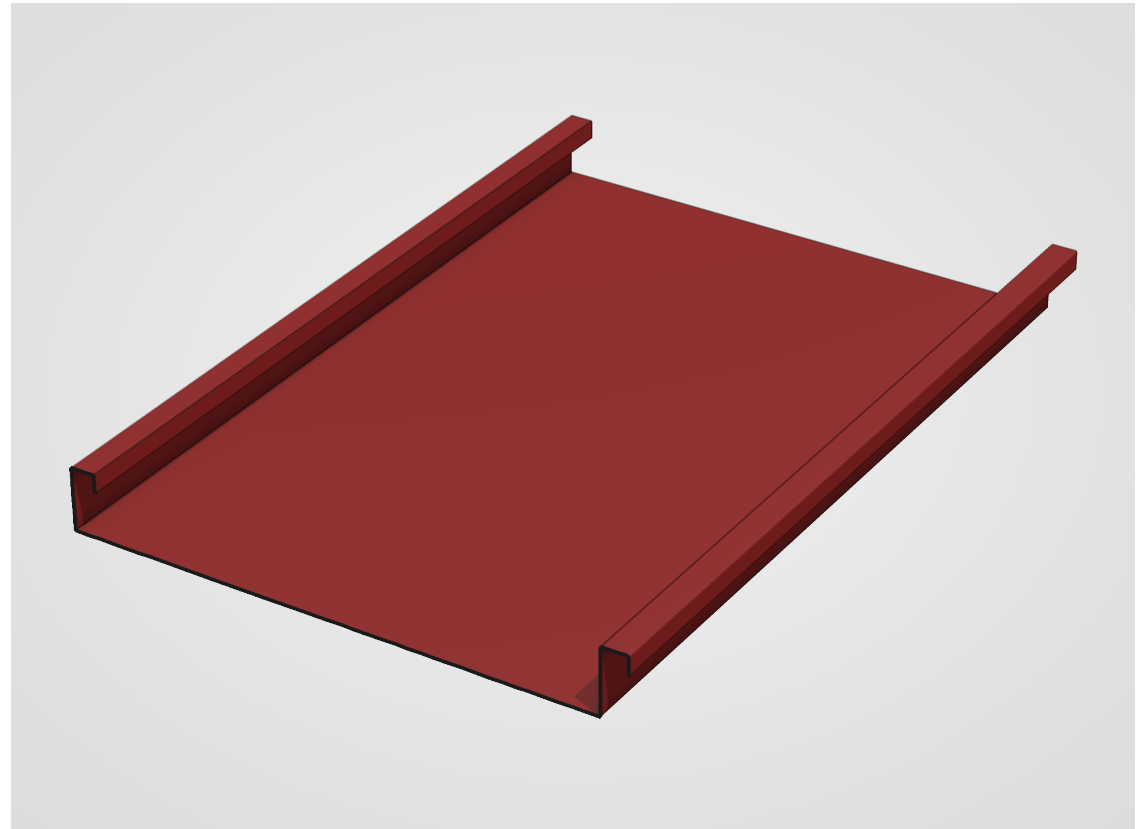

WIDTHS LISTED ABOVE

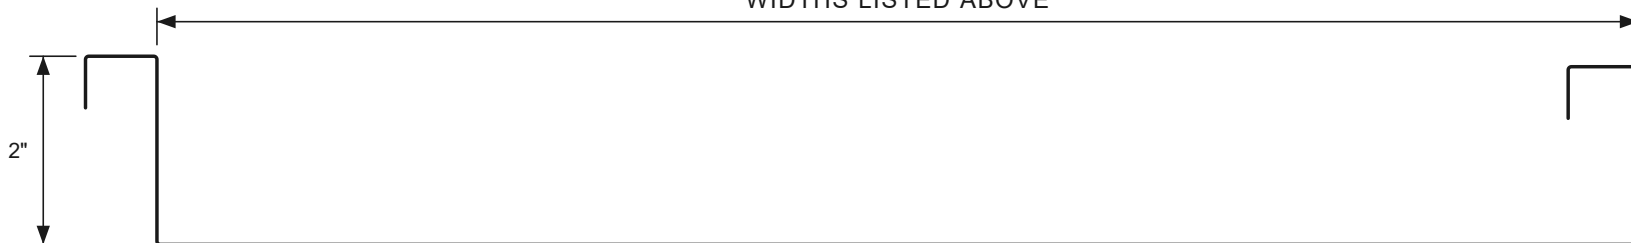

"The Go-To Guys for Metal"

Architectural Sheetmetal Products, Inc.

1329 Amsterdam Road (Route 5) · Scotia, New York 12302

Phone 518-381-6144

www.aspmetals.com

Due to factors of manufacturing, handling and installation methods ... oil canning will not be a factor for product rejection.