
ARCHITECTURAL SHEETMETAL PRODUCTS

"The Go-To Guys for Metal"

TRIM DETAIL

GS24SV1200 STANDARD VALLEY - 12" x 12" - 24GA

PRELIMINARY — FOR REVIEW — NOT FOR FABRICATION

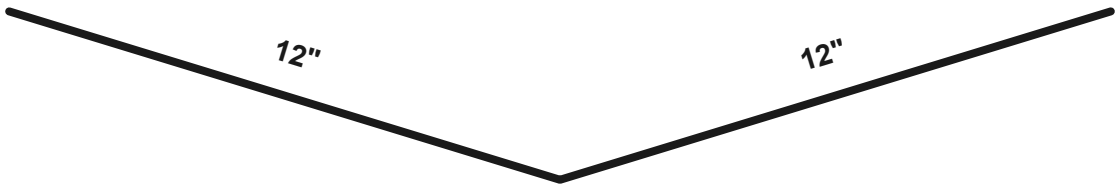

TRIM PROFILE

SCALE: 3" = 1'-0"

0 6"

24GA GALVALUME® STEEL, SPECTRALUME® 70% PVDF FINISH • STRETCHOUT (GIRTH): 24"

PLAIN OPEN VALLEY, RAW EDGES. CENTER BEND FORMED TO SUIT THE ROOF PITCHES; LEG ANGLE SHOWN IS NOMINAL.

SPECIFY BOTH ROOF PITCHES WHEN ORDERING (E.G. 6/12 x 6/12 = 143° VALLEY). INCLUDES (2) ASP JOGGLE CLEATS PER 10' PIECE.

12" x 12" (24" STRETCHOUT). 10" x 10" STANDARD VALLEY: SHEET 05.

STANDARD LENGTH 10'-0". 29GA VERSION: SEE SHEET 124A.

ITEM NO. **GS24SV1200**	SCALE: 3" = 1'-0" DATE: 10-19-26 SERIES: 24GA STANDARD SHEET: 125A (1 OF 1)	DRAWN BY: ASP CHECKED: _____ REV: P0 ISSUED: PRELIMINARY	**ARCHITECTURAL SHEETMETAL PRODUCTS, INC.** 1329 Amsterdam Road (Route 5) Scotia, New York 12302 Phone 518-381-6144 **www.aspmetals.com**

QUICK SNAP 16©
29GA SYSTEM TRIM


ARCHITECTURAL SHEETMETAL PRODUCTS

"The Go-To Guys for Metal"

INSTALLATION DETAIL

GS29SV1000 STANDARD VALLEY

PRELIMINARY — FOR REVIEW — NOT FOR FABRICATION

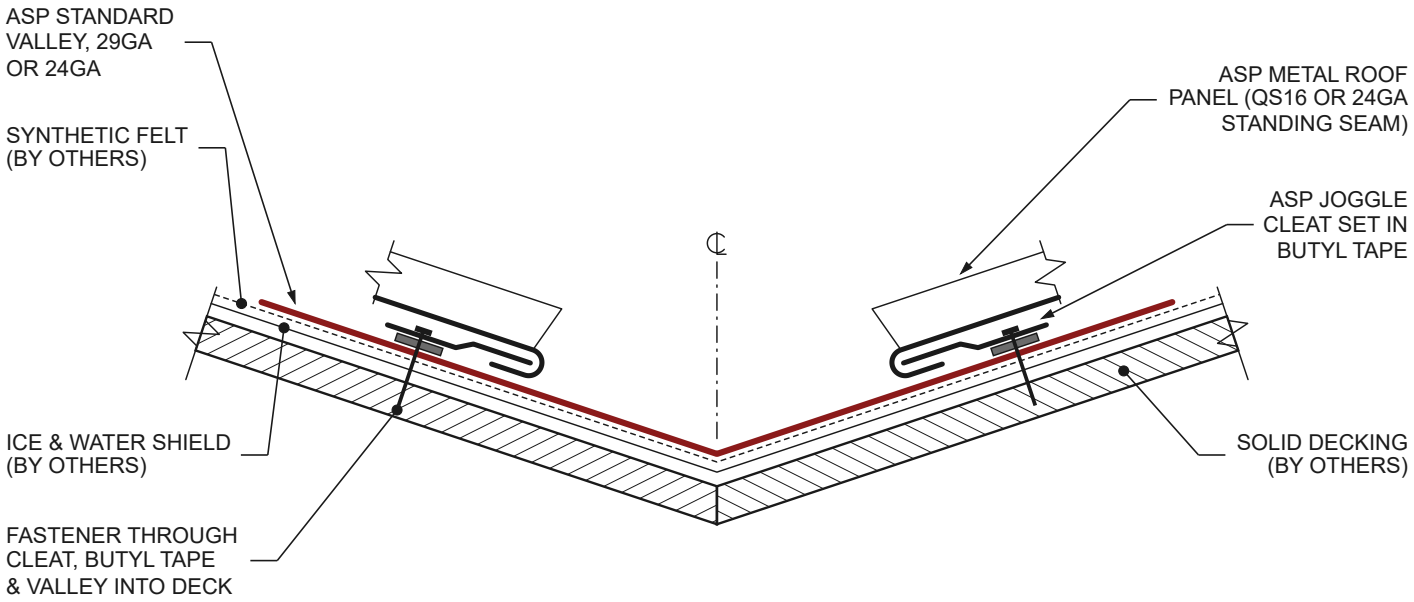

1
05B

STANDARD VALLEY - INSTALLED

SCALE: 3" = 1'-0"

0 6"

SHOWN ON 6/12 x 6/12 (143° VALLEY) WITH QS16 PANELS; 24GA INSTALLS THE SAME WAY. BUTYL TAPE & SCREWS SOLD SEPARATELY BY ASP. CLEATS 4" MIN. FROM VALLEY CENTER; PANEL ENDS FIELD-HEMMED 1" ONTO THEM. FIRST PANEL FASTENER (NOT SHOWN) 6" MIN. FROM END. THE TRIM DETAILED ON THIS SHEET IS SHOWN IN RED. COMPONENTS MARKED (BY OTHERS) ARE NOT SUPPLIED BY ASP. TRIM PROFILE: SEE SHEET 05A.

ITEM NO.			
GS29SV1000	SCALE: 3" = 1'-0" DATE: 10-17-26 SERIES: 29GA QUICK SNAP SHEET: 05B (2 OF 2)	DRAWN BY: ASP CHECKED: _____ REV: P0 ISSUED: PRELIMINARY	**ARCHITECTURAL SHEETMETAL PRODUCTS, INC.** 1329 Amsterdam Road (Route 5) Scotia, New York 12302 Phone 518-381-6144 **www.aspmetals.com**