
ARCHITECTURAL SHEETMETAL PRODUCTS

"The Go-To Guys for Metal"

TRIM DETAIL

GS24ZC218 ZEE CLOSURE - 2-1/8"

PRELIMINARY — FOR REVIEW — NOT FOR FABRICATION

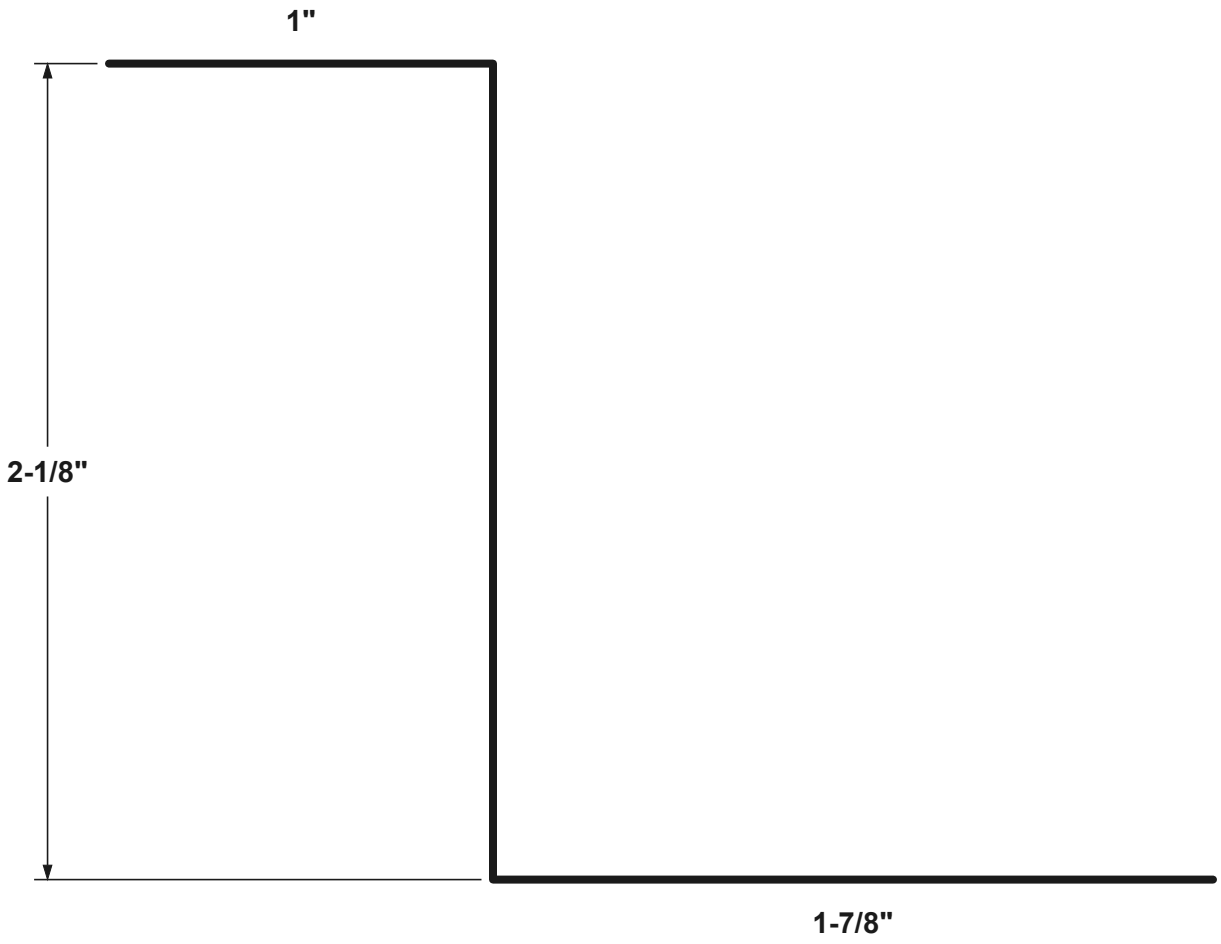

TRIM PROFILE

SCALE: DOUBLE SIZE (2:1)

0 1"

24GA GALVALUME® STEEL, SPECTRALUME® 70% PVDF FINISH • STRETCHOUT (GIRTH): 5"

24GA, 2-1/8" HIGH - FOR A 2" PANEL SEAM (HEIGHT = SEAM + 1/8"). 1" FLANGE HOOKS INTO THE TRIM HEM; 1-7/8" FLANGE SETS IN BUTYL TAPE ON THE PANEL.

VENTED VERSION (PERFORATED WEB): GS24ZCV218, SHEET 121A. TRIM OVER A VENTED ZEE: 8" x 8" MIN. RECOMMENDED.

OTHER HEIGHTS: 1-1/8" SHEET 08A, 1-5/8" SHEET 83A, 1-7/8" SHEET 84A.

FORMER PART NO.: ASP-2008

STANDARD LENGTH 10'-0".

ITEM NO.			
GS24ZC218	SCALE: DOUBLE SIZE (2:1) DATE: 10-17-26 SERIES: 24GA STANDARD SHEET: 85A (1 OF 1)	DRAWN BY: ASP CHECKED: _____ REV: P0 ISSUED: PRELIMINARY	**ARCHITECTURAL SHEETMETAL PRODUCTS, INC.** 1329 Amsterdam Road (Route 5) Scotia, New York 12302 Phone 518-381-6144 **www.aspmetals.com**

QUICK SNAP 16©
29GA SYSTEM TRIM


ARCHITECTURAL SHEETMETAL PRODUCTS

"The Go-To Guys for Metal"

INSTALLATION DETAIL

GS29ZC118 ZEE CLOSURE - 1-1/8" (STANDARD & VENTED)

PRELIMINARY — FOR REVIEW — NOT FOR FABRICATION

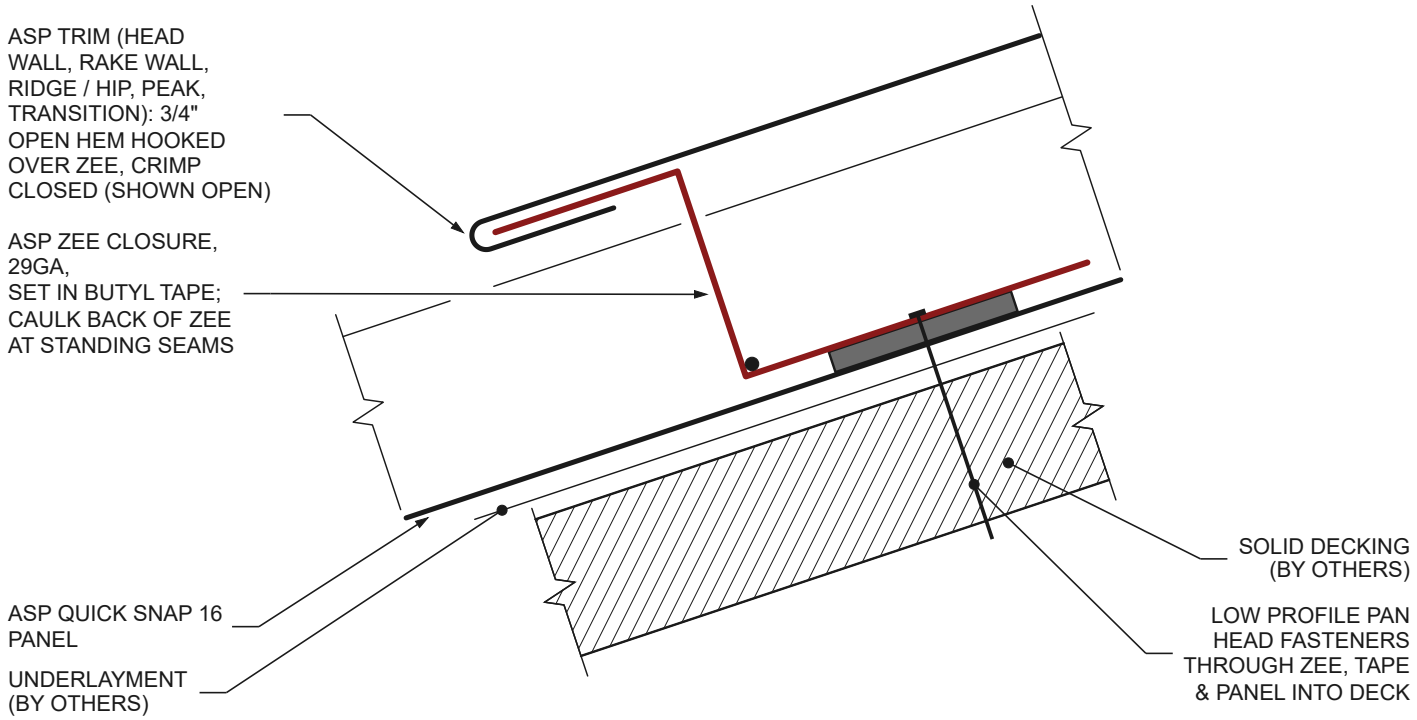

1
08B

ZEE CLOSURE - INSTALLED

SCALE: FULL SIZE

0 2"

QUICK SNAP 16 (29GA) ON 4/12, LAYERS DIAGRAMMATIC. ZEES PER 10': 1 AT HEAD WALL, RAKE WALL, TRANSITION, GAMBREL, PEAK / HPG; 2 AT RIDGE / HIP. FASTENERS: (2) PER PANEL AT QS16 RIDGE / HIP, (3) AT HEAD WALL & 24GA RIDGE, 6" O.C. AT 24GA RAKE WALL. CAULK BEAD IS AT THE SEAMS ONLY. THE TRIM DETAILED ON THIS SHEET IS SHOWN IN RED. COMPONENTS MARKED (BY OTHERS) ARE NOT SUPPLIED BY ASP. TRIM PROFILE: SEE SHEET 08A.

ITEM NO.			
GS29ZC118	SCALE: FULL SIZE DATE: 10-17-26 SERIES: 29GA QUICK SNAP SHEET: 08B (2 OF 2)	DRAWN BY: ASP CHECKED: _____ REV: P0 ISSUED: PRELIMINARY	**ARCHITECTURAL SHEETMETAL PRODUCTS, INC.** 1329 Amsterdam Road (Route 5) Scotia, New York 12302 Phone 518-381-6144 **www.aspmetals.com**